



A Division of Dura Automotive Systems

1120 North Main Street • Elkhart, IN 46514


PHONE: 574-264-2131 FAX: 574-262-2550

INTERNET: <http://www.atwoodmobile.com>

LITERATURE NUMBER **MPD 53402**

PILOT ASSEMBLY REPLACEMENT

Effective 10/21/04

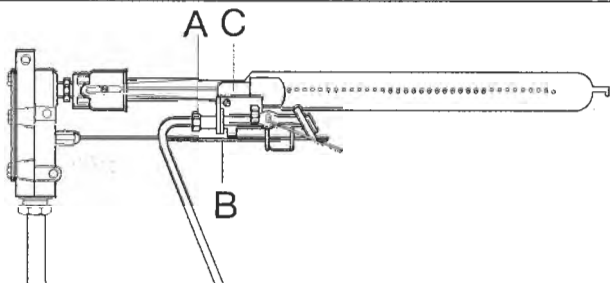

For complete Wedgewood range & cooktop instructions consult MPD 56280.

WARNING **EXPLOSION OR FIRE**

- Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage.
- Refer to MPD 56280 for complete instructions.
- For assistance or additional information consult Atwood Consumer Service Department, a qualified installer, service agency or gas supplier.
- Follow directions exactly for proper installation, adjustment, service and maintenance.

REMOVAL PROCEDURE-

1. Set oven control to OFF
2. Turn off gas supply using appliance shut off valve or valve on gas bottles.
3. Remove oven rack and oven bottom shelf.
4. Disconnect oven pilot assembly gas input line-A.
5. Remove thermocouple-B from pilot assembly.
6. Remove screw-C attaching pilot assembly to oven burner. Pilot assembly is now free.
7. Make sure pilot assembly gas input line is clean and free of obstructions.

continued backside



A Division of Dura Automotive Systems

1120 North Main Street • Elkhart, IN 46514


PHONE: 574-264-2131 FAX: 574-262-2550

INTERNET: <http://www.atwoodmobile.com>

LITERATURE NUMBER **MPD 53402**

PILOT ASSEMBLY REPLACEMENT

Effective 10/21/04

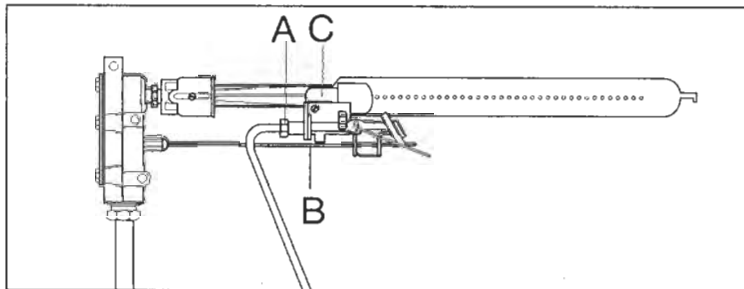

For complete Wedgewood range & cooktop instructions consult MPD 56280.

INSTALLATION PROCEDURE-

1. Install new pilot by following removal instructions in reverse order.
2. Turn on gas supply to appliance.
3. Turn oven control to PILOT ON.
4. Light pilot.
5. Check all connections for gas leaks using a non-corrosive leak detection fluid. Do not use a soap and water solution. Leak test in excess of 8 oz. per square inch (1/2 psi) of air pressure will invalidate warranty.
6. When certain no leak exists, check operation of oven.