

HYDRAULICS

Part # 136046 (Figs. 1 & 2) is used for hydraulic power units that are rated for 2200 PSI and under. The three top posts (Fig. 1A-C) are copper. This solenoid has a steel mounting strap across its base (Fig. 2). This solenoid is used on towable units with either hydraulic slide-outs or landing gear or a combination of both.

Part #118246 (Figs. 3 & 4) is used for hydraulic power units that are rated over 2200 PSI. The three top posts (Fig. 3A-C) are silver alloy. This solenoid has no mounting strap (Fig. 4). This solenoid is used on motorized units and towable units with Level-Up.


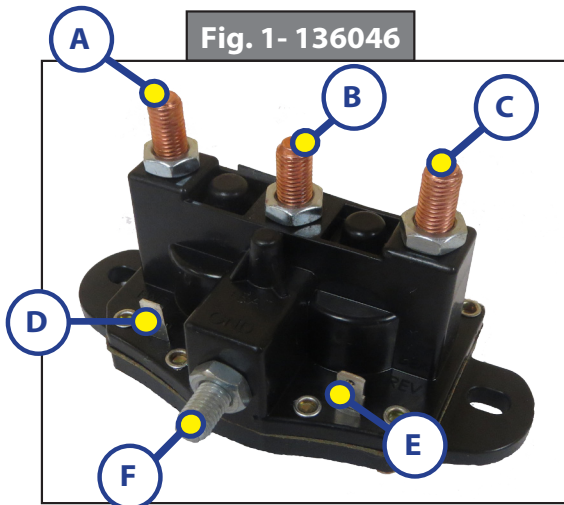


Fig. 2- 136046

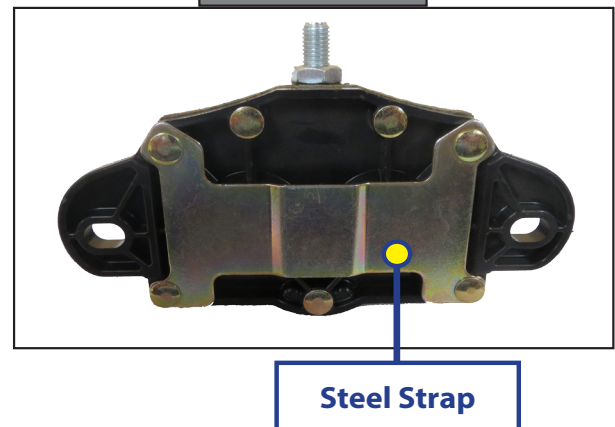

Steel Strap

Letter	Towable - Fig. 1	Motorized - Fig. 3	Level-Up Towable - Fig. 3
A	Motor Reverse - CCW	Motor Reverse - CCW	Motor Reverse - CCW
B	Power In	Power In	Power In
C	Motor Forward - CW	Motor Forward - CW	Motor Forward - CW
D	Extend Signal	Retract Signal	Extend Signal
E	Retract Signal	Extend Signal	Retract Signal
F	Ground	Ground	Ground


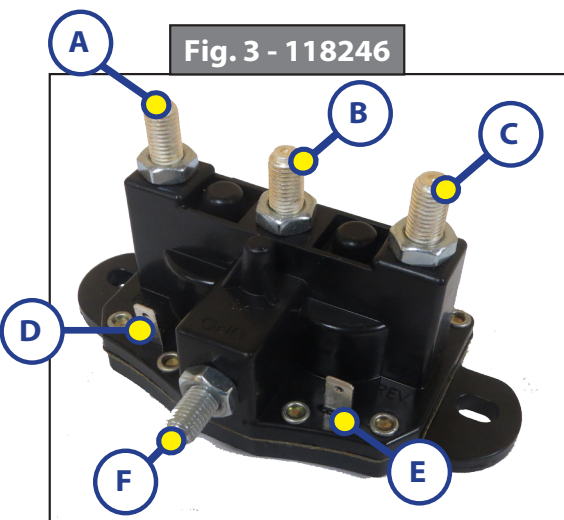


Fig. 4 - 118246

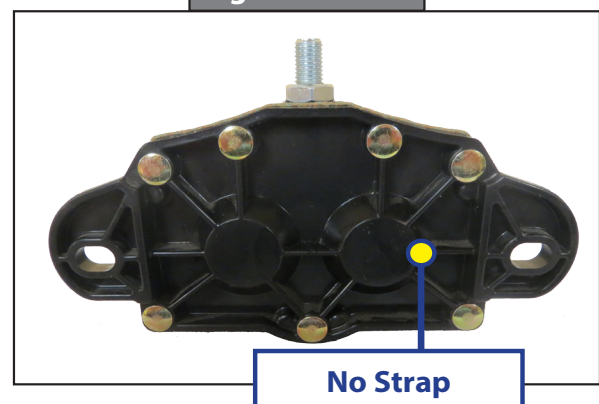

No Strap