

# 3108706.015 KIT, BOTTOM MOUNTING BRACKET (UPDATE)

KIT CONTAINS:	QTY.
3104653.005 Bracket Assembly Bottom .....	2
830553.001 Patio Foot.....	2
317534.006 1/4" - 20 Nut with Nylon Insert .....	2
113299 1/4" - 20 x 2-3/4" Slotted Pan Head Screws .....	2
113075.002 #14 x 2-1/2" Hex Head Sheet Metal Screws .....	4
3104485.002 Spacer, Bottom Bracket .....	2ea.

## TOOLS REQUIRED:

- Electric Drill
- Drill Bit 3/16"
- Drill Bit 7/32"
- Drill Bit 1/4"
- Phillips Screwdriver
- Socket Wrenches

## GENERAL INSTRUCTIONS


This Kit is designed to fit the 5000, 8000, 8500, 9000 and 9500 awnings. It will update the bottom mounting bracket and patio foot to the current style.

This Kit is designed to be used on **straight sided hardware only**.

**Read all instructions before beginning installation. Instructions assume the awning is mounted on the vehicle.**


### 1. Bottom Mounting Bracket Installation

- A. Without opening awning, remove patio foot from Bottom mounting bracket by pressing black tab on left side of bracket and pulling straight out on arm assembly. Swing away from bottom mounting bracket.

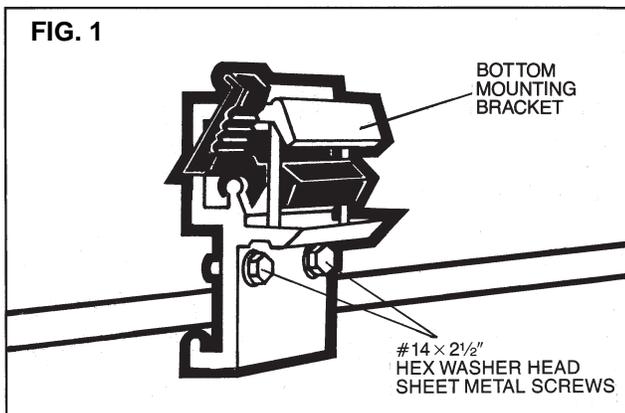


- B. Remove existing bottom mounting bracket by taking out two (2) #14 x 2-1/2" Hex Washer Head Sheet Metal Screws securing bracket to vehicle. (FIG. 1)
- C. Position new bottom spacer bracket in same location. Using holes in new bracket as a guide, mark and drill two (2) 3/16" holes in vehicle. (Use a 7/32" hole if going through steel.)

- D. If mounting on flat surface, use bottom bracket insert between vehicle and bottom bracket. (FIGS. 2A & 2B).
- E. Place the new bottom bracket on top of the spacer. Secure both new brackets to vehicle with two (2) #14 x 2-1/2" Hex Washer Head Sheet Metal Screws.

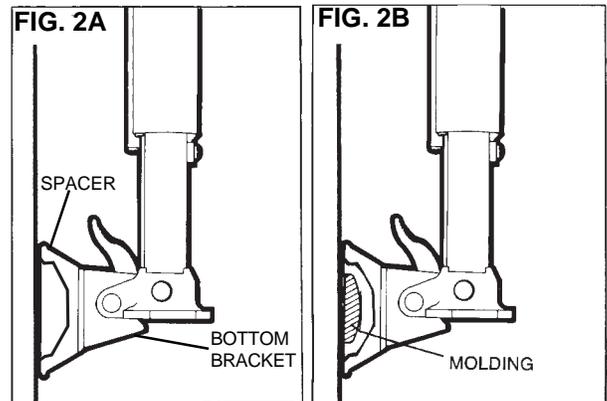


### 2. Patio Foot Installation

- A. Assure travel lock pin is in place. Raise lift handle and separate adjustable arm from main arm. Allow top of main arm to rest on top bracket.
- B. Remove existing patio foot by using a 1/4" drill bit to drill out rivet which connects patio foot to adjustable arm. (FIG. 3).

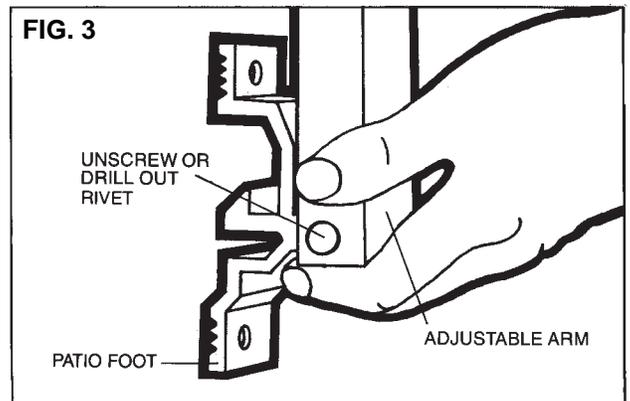


- C. Using existing hole in adjustable arm, attach new patio foot using 1/4" - 20 x 2-3/4" slotted pan head screw and 1/4" nut with nylon insert. (FIG. 4)

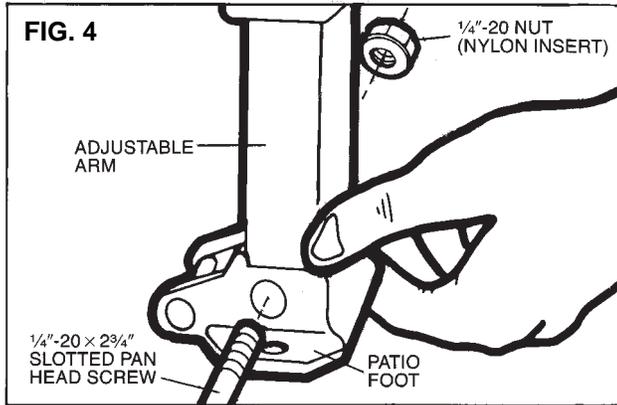

### 3. Stop Plug Adjustment

- A. Move stop plug assembly from current location to one (1) hole lower on adjustable arm. (FIG. 5)

**NOTE:** If stop plug is located in lowest hole of adjustable arm, drill a 3/8" hole 3/4" below the center of the last hole.

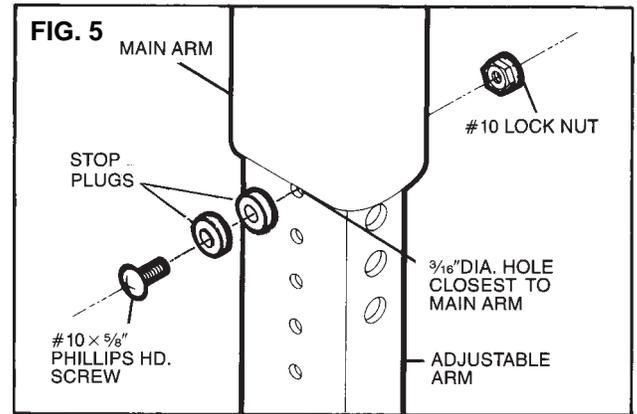

- B. Insert adjustable arm in main arm until stop plug contacts bottom of main arm.  
 C. Insert new patio foot into new bottom bracket so latch on bracket catches rivet of patio foot.

### 4. Repeat Steps 1-3 on other Arm Assembly.

- 5. NOTE:** Operate awning per operating instructions and insure stop plugs are located in proper position. If properly positioned, main arm should clear top mounting bracket as it moves past. If the main arm contacts top bracket, move stop plug up one hole on adjustable arms.